

UNI-TREND TECHNOLOGY (CHINA) CO.,LTD.

TEST REPORT

SCOPE OF WORK

EMC TESTING-UTi160S

REPORT NUMBER

240703084GZU-002

ISSUE DATE

16 August 2024

[REVISED DATE]

[-----]

PAGES

27

DOCUMENT CONTROL NUMBER

FCC Part 15:2021-a

© 2022 INTERTEK



TEST REPORT

Applicant Name & Address : UNI-TREND TECHNOLOGY (CHINA) CO.,LTD.
No 6, Gong Ye Bei 1 st Road, Songshan Lake National High-Tech
Industrial Development Zone, Dongguan, Guangdong Province,
China
Manufacturing Site : Same as applicant
Intertek Report No: 240703084GZU-002

Test standards

CFR 47, FCC Part 15, Subpart B:2023

Sample Description

Product : Professional Thermal Imager
Model No. : UTi160S
Electrical Rating : USB input: 5V, 2A; 3.7Vdc/2600mAh 18650 Li-ion battery
Serial No. : Not Labeled
Date Received : 03 July 2024
Date Test : 03 July 2024 to 15 August 2024
Conducted

Prepared and Checked By



Jed Guo

Project Engineer

Approved By:



Sky Zhu

Supervisor

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch
Room101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District, Guangzhou, Guangdong,
China

TEST REPORT

CONTENT

TEST REPORT	1
CONTENT	3
1. TEST RESULTS SUMMARY	4
2. EMC RESULTS CONCLUSION.....	5
3. LABORATORY MEASUREMENTS.....	6
4. EQUIPMENT USED DURING TEST	8
5. EMI TEST.....	10
5.1 CONDUCTED DISTURBANCE VOLTAGE AT MAINS PORTS	10
5.1.1 Block Diagram of Test Setup.....	10
5.1.2 Test Setup and Procedure	10
5.1.3 Limit.....	11
5.1.4 Test Data and curve.....	12
5.2 RADIATED EMISSION 30 MHz -1000 MHz	14
5.2.1 Block Diagram of Test Setup.....	14
5.2.2 Test Setup and Procedure	14
5.2.3 Limit.....	15
5.2.4 Test Data and Curve	16
5.3 RADIATED EMISSION ABOVE 1 GHz	22
6. APPENDIX I - PHOTOS OF TEST SETUP	23
7. APPENDIX II – PHOTOS OF EUT	24

TEST REPORT

1. TEST RESULTS SUMMARY

Classification of EUT: Class A

Test Item	Standard	Result
Conducted disturbance voltage at mains ports	CFR 47, FCC Part 15, Subpart B	Pass
Radiated emission (30 MHz–1 GHz)	CFR 47, FCC Part 15, Subpart B	Pass
Radiated emission (Above 1 GHz)	CFR 47, FCC Part 15, Subpart B	N/A
Remark: Reference publication is used for methods of measurement: ANSI C63.4:2014		

Remark:

1. The symbol "N/A" in above table means Not Applicable.
2. When determining the test results, measurement uncertainty of tests has been considered.

TEST REPORT

2. EMC RESULTS CONCLUSION

RE: EMC Testing Pursuant to FCC part 15 performed on the Professional Thermal Imager, Model: UTi160S.

We tested the Professional Thermal Imager, Model: UTi160S to determine if it was in compliance with the relevant standards as marked on the Test Results Summary. We found that the unit met the requirement of FCC part 15 standard when tested as received. The worst case's test data was presented in this test report.

The production units are required to conform to the initial sample as received when the units are placed on the market.

TEST REPORT

3. LABORATORY MEASUREMENTS

Configuration Information

Support Equipment:

Equipment	Model No.	Rating	Supplier
Adapter	CHP-002	100-240~, 50/60Hz	Intertek

Rated Voltage and frequency under test: 120 V~, 60 Hz;3.7VDC
Condition of Environment: Temperature: 22~28°C
Relative Humidity:35~60%
Atmosphere Pressure:86~106kPa

Notes:

1. The EMI measurements had been made in the operating mode produced the largest emission in the frequency band being investigated consistent with normal applications. An attempt had been made to maximize the emission by varying the configuration of the EUT.

2. Test Facility accreditation:

A2LA Certificate Number 0078.10

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch is accredited by A2LA and Listed in FCC website. FCC accredited test labs may perform both Certification testing under Parts 15 and 18 and Declaration of Conformity testing.

3. Test Location:

Intertek Testing Services Shenzhen Ltd. Guangzhou Branch

All tests were performed at:

Room101/301/401/102/202/302/402/502/602/702/802, No. 7-2, Caipin Road, Huangpu District, Guangzhou, Guangdong, China

Except Radiated Emissions was performed at:

Room 102/104, No 203, KeZhu Road, Science City, GETDD Guangzhou, China

4. Measurement Uncertainty

TEST REPORT

No.	Item	Measurement Uncertainty
1	Conducted Emission (9 kHz-150 kHz)	2.80 dB
2	Conducted Emission (150 kHz-30 MHz)	2.23 dB
3	Conducted Emission with VP	1.77 dB
4	Conducted Emission with AAN	4.18 dB
5	Conducted Emission with CVP and CP	3.77 dB
6	Conducted Emission with CP	2.36 dB
7	Disturbance Power (30 MHz-300 MHz)	3.17 dB
8	Radiated Emission with CDNE	1.86 dB
9	Radiated Emission (9 kHz-150 kHz) LLAS	3.48 dB
10	Radiated Emission (150 kHz -30 MHz) LLAS	3.09 dB
11	Radiated Emission (9 kHz-30 MHz) Loop	3.64 dB
12	Radiated Emission (30 MHz-1 GHz)	4.26 dB
13	Radiated Emission (1 GHz-6 GHz)	4.46 dB
14	Radiated Emission (6 GHz-18 GHz)	4.96 dB
15	Radiated Emission (18 GHz-26.5 GHz)	5.16 dB
16	Radiated Emission (26.5 GHz-40 GHz)	5.16 dB

The measurement uncertainty describes the overall uncertainty of the given measured value during the operation of the EUT.

Measurement uncertainty is calculated in accordance with CISPR16-4-2:2011+A1:2014 +A2:2018.

The measurement uncertainty is given with a confidence of 95%, k=2.

Determination of the test conclusion is based on IEC Guide 115 in consideration of measurement uncertainty.

TEST REPORT

4. EQUIPMENT USED DURING TEST

Conducted Disturbance-Mains Terminal (2)

Equipment No.	Equipment	Model	Manufacturer	Calibration Interval
EM031-04	EMI receiver	ESR3	R&S	1Y
EM006-06	LISN	ENV216	R&S	1Y
SA047-111	Digital Temperature-Humidity Recorder	RS210	YIJIE	1Y
EM004-03	EMC shield Room	8m×4m×3m	Zhongyu	1Y
EM031-04-01	EMC32 software (CE)	V10.01.00	R&S	N/A

Radiated Disturbance (30 MHz-1 GHz)

Equipment No.	Equipment	Model	Manufacturer	Calibration Interval
EM030-04	3m Semi-Anechoic Chamber	9×6×6 m3	ETS-LINDGREN	1Y
EM031-02	EMI Test Receiver (9 kHz~7 GHz)	R&S ESR7	R&S	1Y
EM033-01	TRILOG Super Broadband test Antenna (30 MHz-3 GHz)	VULB 9163	SCHWARZBECK	1Y
EM031-02-01	Coaxial cable	/	R&S	1Y
EM036-01	Common-mode absorbing clamp	CMAD 20B	TESEQ	1Y
SA047-118	Digital Temperature-Humidity Recorder	RS210	YIJIE	1Y
EM045-01-01	EMC32 software (RE/RS)	V10.01.00	R&S	N/A

TEST REPORT

Detail of the equipment calibration due date:

Equipment No.	Cal. Due date (DD-MM-YYYY)
Conducted Disturbance-Mains Terminal (1)	
EM080-05	06/06/2025
EM006-05	04/06/2025
SA047-112	22/10/2024
EM004-04	03/01/2025
Conducted Disturbance-Mains Terminal (2)	
EM031-04	04/01/2025
EM006-06	04/09/2024
SA047-111	22/10/2024
EM004-03	03/01/2025
EM031-04-01	N/A
Conducted Disturbance-Load and Control Terminal (1)	
EM080-05	06/06/2025
EM080-05-01	04/09/2024
EM019-06	06/03/2025
SA047-112	22/10/2024
EM004-04	03/01/2025
Conducted Disturbance-Load and Control Terminal (2)	
EM080-05	06/06/2025
EM005-06-01	04/09/2024
EM019-06	06/03/2025
SA047-112	22/10/2024
EM004-04	03/01/2025
Conducted Disturbance-Telecom Terminal	
EM080-05	06/06/2025
EM011-05	09/04/2025
EM011-06	09/04/2025
EM006-06	04/09/2024
SA047-112	22/10/2024
EM004-04	03/01/2025
Conducted Disturbance-Antenna Terminal	
EM031-04	04/01/2025
EM084-02	17/03/2025
EM041-01	15/01/2025
EM041-02	15/01/2025
SA047-111	22/10/2024
EM004-03	03/01/2025

Equipment No.	Cal. Due date (DD-MM-YYYY)
Radiated Disturbance (CDN Method)	
EM080-05	06/06/2025
EM003-02	12/11/2024
EM003-03	12/11/2024
EM046-04-03	03/03/2025
EM032-02-01	11/07/2025
EM032-02-02	11/07/2025
SA047-112	22/10/2024
EM004-04	03/01/2025
Radiated electromagnetic disturbances (9 kHz-30 MHz)	
EM031-04	04/01/2025
EM061-04	03/03/2025
SA047-111	22/10/2024
EM004-03	03/01/2025
Radiated Disturbance (9 kHz-30 MHz)	
EM030-04	09/04/2025
EM031-02	15/11/2024
EM011-04	07/07/2025
EM031-02-01	09/04/2025
SA047-118	15/07/2025
EM045-01-01	N/A
Radiated Disturbance (30 MHz-1 GHz)	
EM030-04	09/04/2025
EM031-02	15/11/2024
EM033-01	05/12/2024
EM031-02-01	09/04/2025
EM036-01	15/07/2025
SA047-118	15/07/2025
EM045-01-01	N/A
Radiated Disturbance (1-18 GHz)	
EM030-04	09/04/2025
EM031-02	15/11/2024
EM031-03	12/11/2024
EM033-02	02/07/2025
EM033-02-02	09/04/2025
EM022-03	15/05/2025
SA047-118	15/07/2025
EM045-01-01	N/A


TEST REPORT

5. EMI TEST

5.1 Conducted Disturbance Voltage at mains ports

Test Result: Pass

5.1.1 Block Diagram of Test Setup

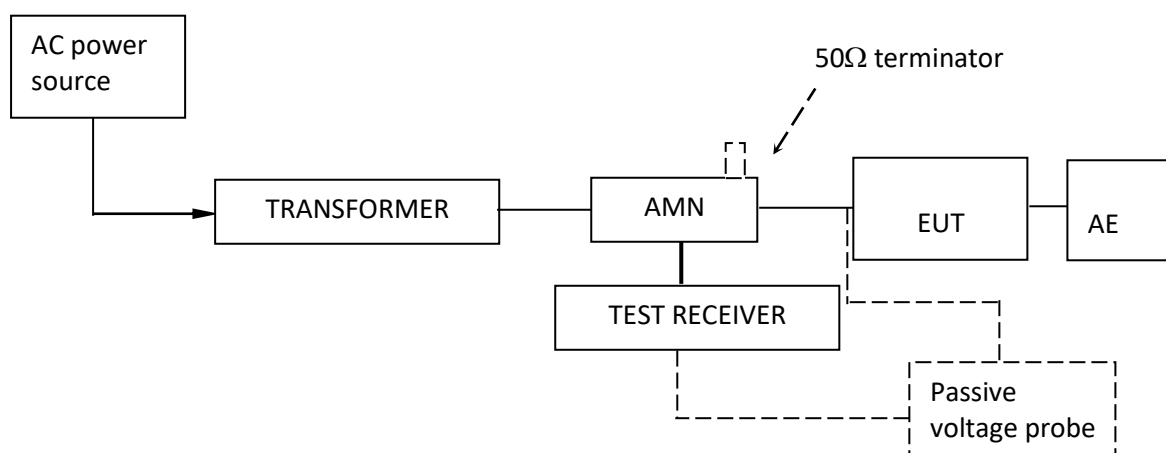

5.1.2 Test Setup and Procedure

The EUT was set to achieve the maximum emission level. The mains terminal disturbance voltage was measured with the EUT in a shielded room. The EUT was connected to AC power source through an Artificial Mains Network which provides a 50Ω linear impedance. Artificial hand is used if appropriate (for handheld apparatus). The load/control terminal disturbance voltage was measured with passive voltage probe if appropriate.

The table-top EUT was placed on a 0.8m high non-metallic table above earthed ground plane (Ground Reference Plane). And for floor standing EUT, was placed on a 0.1m high non-metallic supported on GRP. The EUT keeps a distance of at least 0.8m from any other of the metallic surface. The Artificial Mains Network is situated at a distance of 0.8m from the EUT. During the test, mains lead of EUT excess 0.8m was folded back and forth parallel to the lead so as to form a horizontal bundle with a length between 0.3m and 0.4m.

The bandwidth of test receiver was set at 9 kHz. The frequency range from 150 kHz to 30MHz was checked.

TEST REPORT

5.1.3 Limit

Frequency range MHz	AC mains terminals dB (uV)	
	Quasi-peak	Average
0.15 to 0.5	79	66
0.5 to 30	73	60
Note : The lower limit is applicable at the transition frequency.		

TEST REPORT


5.1.4 Test Data and curve

At mains terminal:

Tested Wire: Live

Operation Mode: charging and measuring(worst)

Full Spectrum

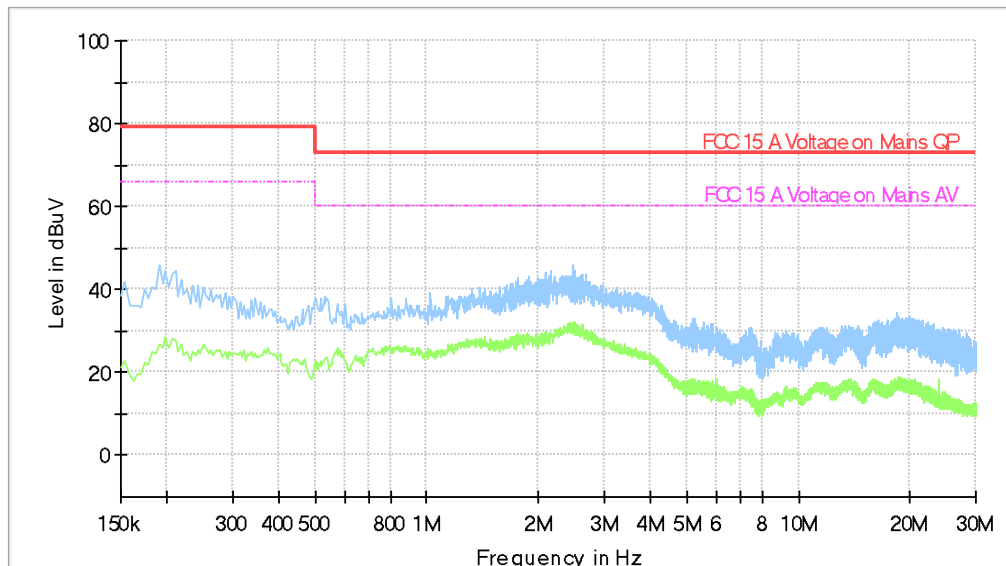


All emission levels are more than 10 dB below the limit.

TEST REPORT

Tested Wire: Neutral

Operation Mode: charging and measuring(worst)

Full Spectrum

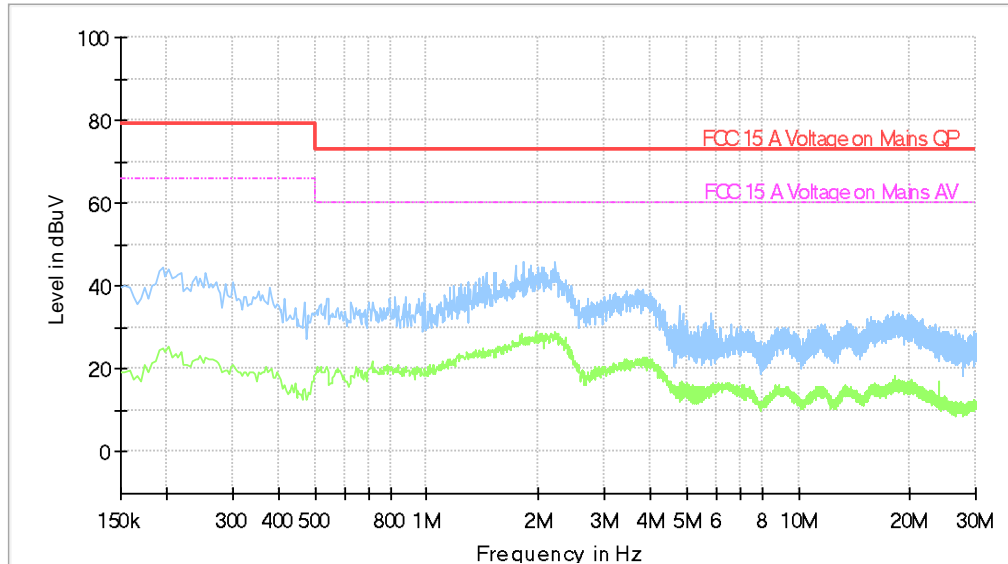


All emission levels are more than 10 dB below the limit.

TEST REPORT

5.2 Radiated Emission 30 MHz -1000 MHz

Test Result: Pass

5.2.1 Block Diagram of Test Setup

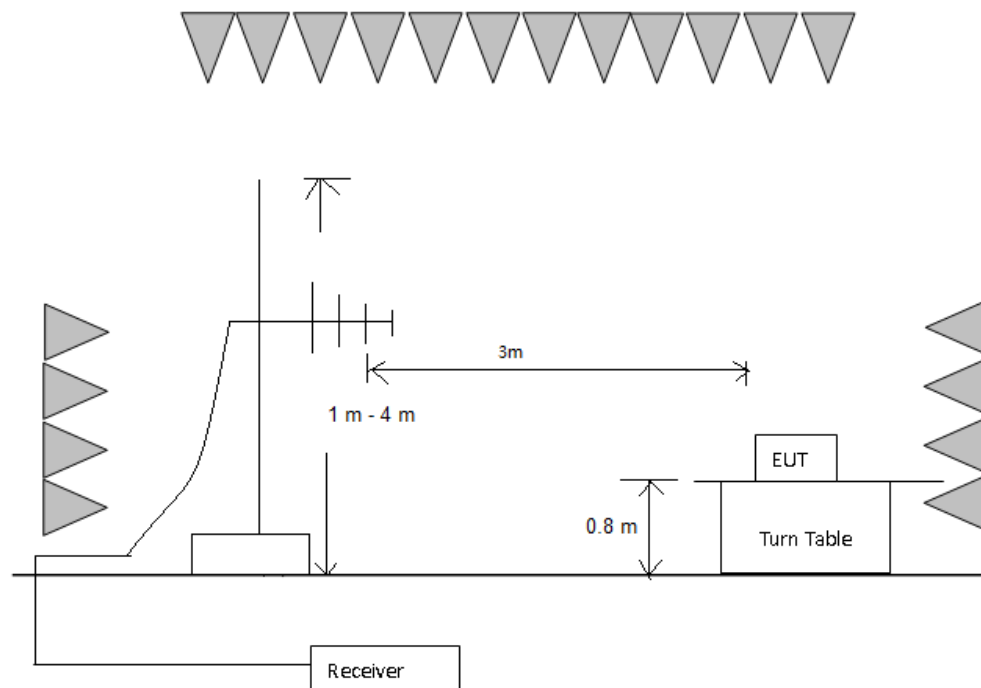

5.2.2 Test Setup and Procedure

The measurement was applied in a semi-anechoic chamber. The EUT and simulators were placed on a 0.8 m high foamed table above the horizontal metal ground plane. The turn table rotated 360 degrees to determine the position of the maximum emission level. The EUT was set 3 meters away from the receiving antenna which was mounted on an antenna mask. The antenna moved up and down between from 1 meter to 4 meters to find out the maximum emission level.

Broadband antenna was used as receiving antenna. Both horizontal and vertical polarization of the antenna was set on measurement. In order to find the maximum emission, all of the interface cables were manipulated according to ANSI C63.4 requirement during radiated test. The bandwidth setting on R&S Test Receiver was 120 kHz.

For an unintentional radiator, including a digital device, the spectrum shall be investigated from the lowest radio frequency signal generated or used in the device, without going below the lowest frequency for which a radiated emission limit is specified, up to the frequency shown in the following table:

TEST REPORT

Highest frequency generated or used in the device or on which the device operates or tunes (MHz)	Upper Frequency of Radiated Measurement
Below 1.705 MHz	30MHz
1.705 MHz – 108 MHz	1 GHz
108 MHz – 500 MHz	2 GHz
500 MHz – 1 GHz	5 GHz
Above 1 GHz	5th harmonic of the highest frequency or 40 GHz, whichever is lower.
At transitional frequencies the lower limit applies.	

Remark: Radiated Emission was performed from 30 MHz to 1 GHz.

5.2.3 Limit

Class A limit at 3 m test distance:

Frequency range MHz	Quasi-peak limits dB (μV/m)
30 to 88	49.6
88 to 216	54.0
216 to 960	56.9
960 to 1000	60.0
At transitional frequencies the lower limit applies.	


TEST REPORT

5.2.4 Test Data and Curve

Operation Mode: charging and measuring

Test voltage: 120V, 60Hz

Horizontal

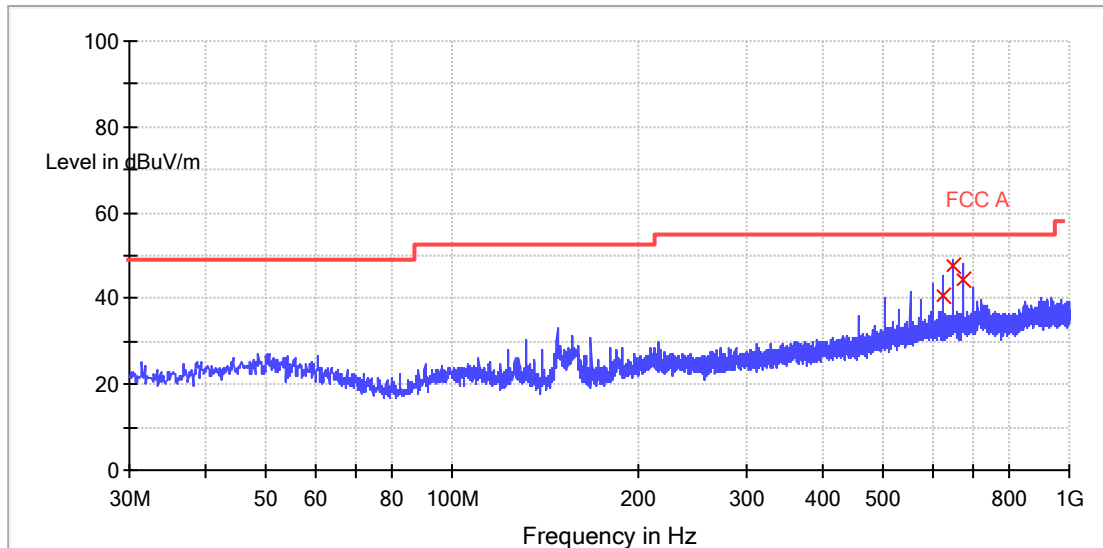

QP


Frequency (MHz)	Quasi Peak (dBuV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
624.040000	40.8	120.000	V	27.8	16.1	56.9
648.000000	47.8	120.000	V	28.0	9.1	56.9
672.040000	44.4	120.000	V	28.2	12.5	56.9

Remark:

1. Corr. (dB) = Antenna Factor (dB) + Cable Loss (dB)
2. Quasi Peak (dBuV/m) = Corr. (dB) + Read Level (dBuV)
3. Margin (dB) = Limit QPK (dBuV/m) – Quasi Peak (dBuV/m)

TEST REPORT

Vertical

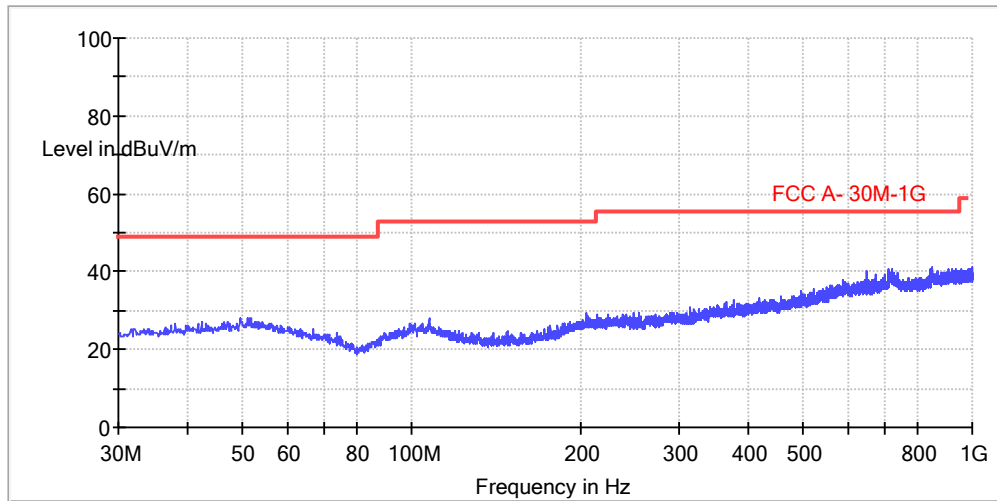


All emission levels are more than 6 dB below the limit.

TEST REPORT

Operation Mode: measuring

Test voltage: DC 3.7V

Horizontal

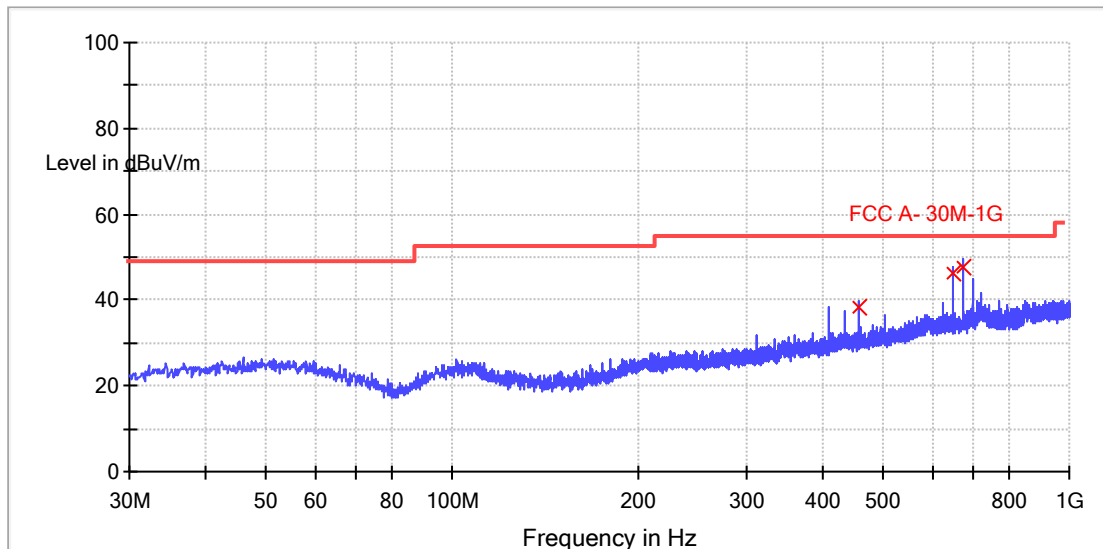

QP


Frequency (MHz)	Quasi Peak (dBuV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
456.040000	38.3	120.000	H	24.4	18.6	56.9
648.000000	46.3	120.000	H	28.0	10.6	56.9
672.000000	47.6	120.000	H	28.2	9.3	56.9

Remark:

1. Corr. (dB) = Antenna Factor (dB) + Cable Loss (dB)
2. Quasi Peak (dBuV/m) = Corr. (dB) + Read Level (dBuV)
3. Margin (dB) = Limit QPK (dBuV/m) – Quasi Peak (dBuV/m)

TEST REPORT

Vertical

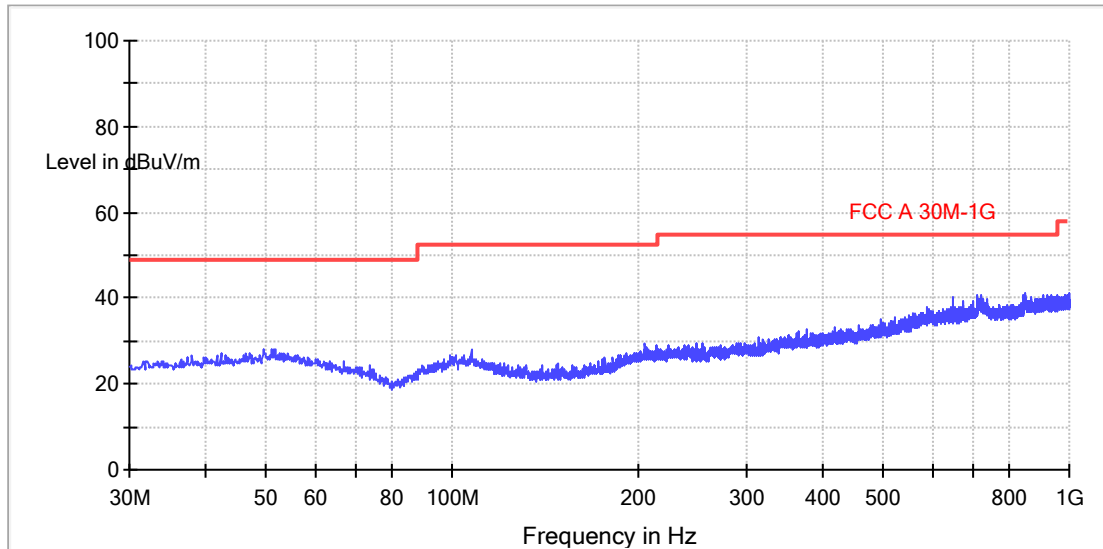


All emission levels are more than 6 dB below the limit.

TEST REPORT

Operation Mode: USB communication

Test voltage: DC 3.7V

Horizontal

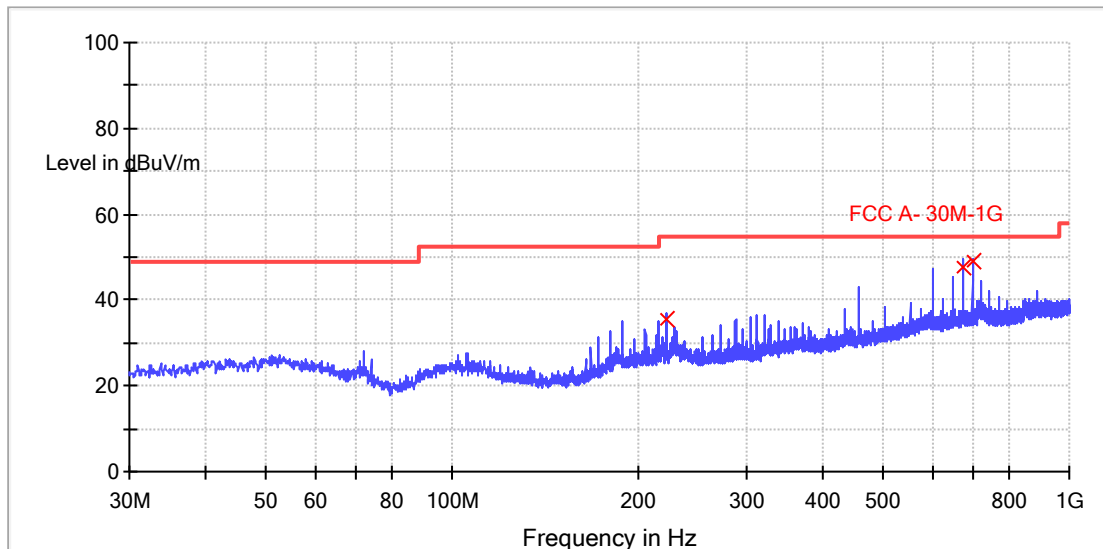


Frequency (MHz)	Quasi Peak (dBuV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
222.160000	35.7	120.000	H	19.6	21.2	56.9
672.040000	47.8	120.000	H	28.2	9.1	56.9
696.000000	49.3	120.000	H	28.4	7.6	56.9

Remark:

1. Corr. (dB) = Antenna Factor (dB) + Cable Loss (dB)
2. Quasi Peak (dBuV/m) = Corr. (dB) + Read Level (dBuV)
3. Margin (dB) = Limit QPK (dBuV/m) – Quasi Peak (dBuV/m)

TEST REPORT

Vertical

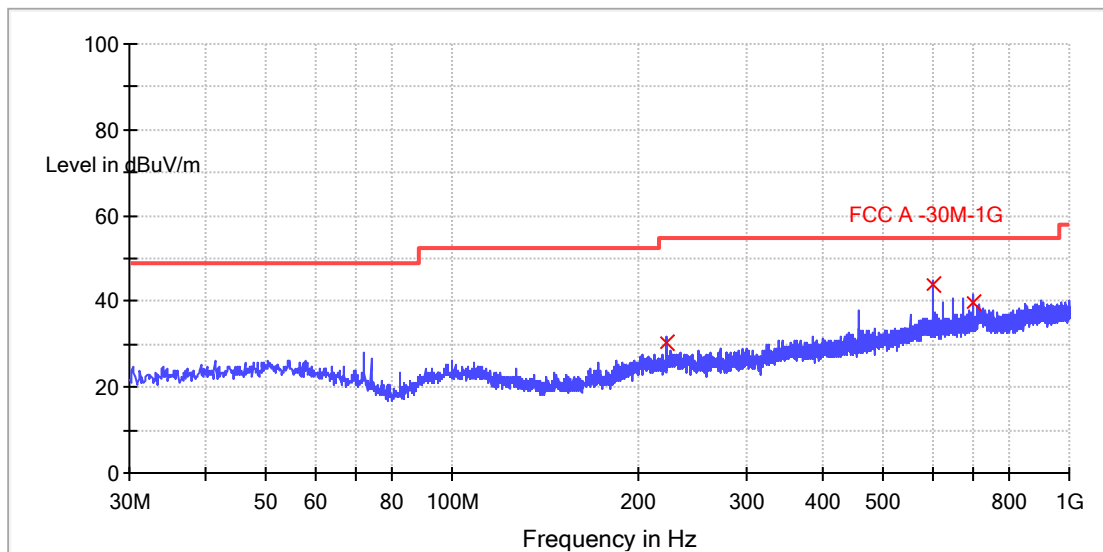

Frequency (MHz)	Quasi Peak (dBuV/m)	Bandwidth (kHz)	Pol	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
222.160000	30.5	120.000	V	19.6	26.4	56.9
600.000000	44.2	120.000	V	27.7	12.8	56.9
696.000000	39.7	120.000	V	28.4	17.2	56.9

Remark:

1. Corr. (dB) = Antenna Factor (dB) + Cable Loss (dB)
2. Quasi Peak (dBμV/m) = Corr. (dB) + Read Level (dBμV)
3. Margin (dB) = Limit QPK (dBμV/m) – Quasi Peak (dBμV/m)

TEST REPORT

5.3 Radiated Emission above 1 GHz

Test Result: Not Applicable

Remark:

The highest internal source of the EUT is not more than 108 MHz, so the measurement above 1000 MHz is not applicable.

TEST REPORT

6. APPENDIX I - PHOTOS OF TEST SETUP

Conducted Emission



Radiated Emission (30 MHz–1000 MHz)



TEST REPORT

7. APPENDIX II – PHOTOS OF EUT



Photo 1 – Front view

TEST REPORT



Photo 2 – Rear view



Photo 3 – Side view

TEST REPORT



Photo 4 – Other Side view

TEST REPORT



Photo 5 – Internal view

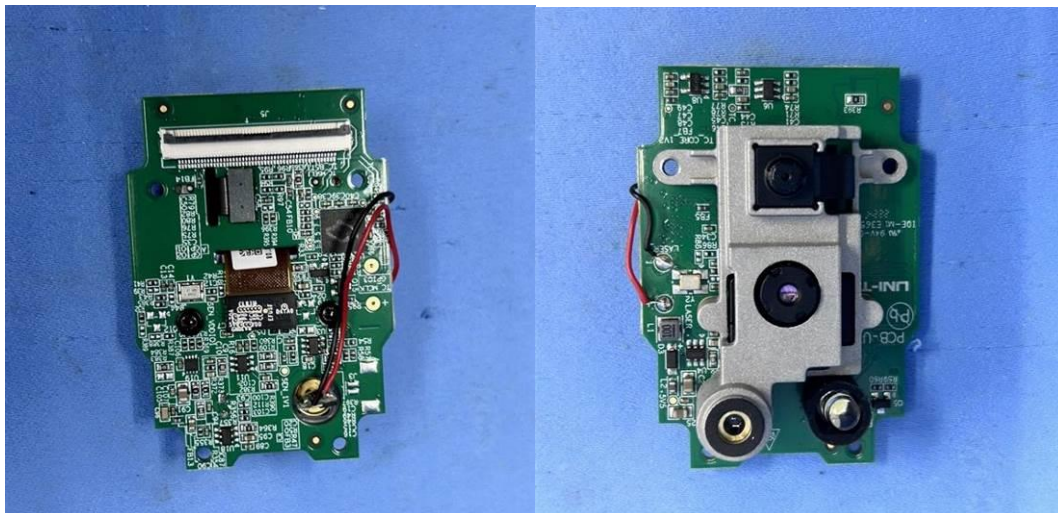


Photo 6 – PCB view

*****End of Report*****